




## **OWNERS MANUAL**

### **AQR-ABGSLD "Aquarius" Step/Ladder/Deck Light.**

**\*This product is an add on option for GEM-ABGRSK.**

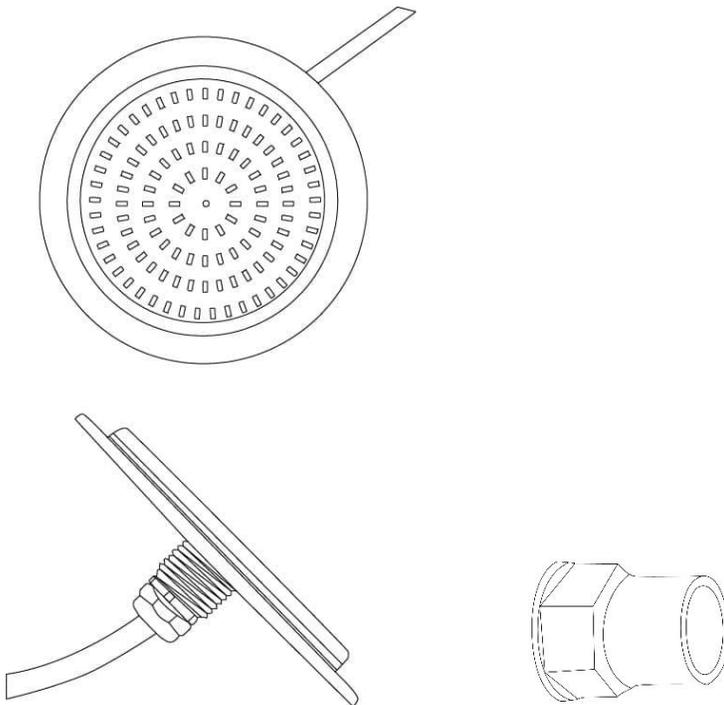

**WARNING! THOROUGHLY READ ALL INSTRUCTIONS  
BEFORE INSTALLING**

- **AQR-ABGSLD "Aquarius" Step/Ladder/Deck Light.**
- **Install into your pool's Step Riser.**



**Specifications:**

ARI-360RL	VOLTAGE (V)	FREQUENCY (HZ)	CURRENT (A)	WATTS (W)
INPUT	120	60	5	-
OUTPUT	24	60	0.8	12w Max

**Tools Required**



Adjustable Pliers



1/2inch Hole Saw

**Getting Started**

- Remove the unit and test
- Download Smart Life-Smart Living App:



**SPECIFICATIONS:**

- 360° WiFi + BLE Return Smart RGBW LED Light.
- Output Voltage: DC 24V.
- Power: 12W.
- Power Adapter: DC 24V, 3A, 24W.
- 7.62 meters of cable/IP65 5-Pin connector.
- Lamp body material: ABS/Polycarbonate.
- Colour Temperature: RGBW.
- Complies with UL 676 and CSA C22.2 No. 89.
- Adjust the water flow 360° to create the perfect vortex water flow.
- 360° full water flow-greater agitation-will not restrict water flow.


**How to use it?**

**02. Download and APP registration**

Download the "Smart Life" APP from the APP Store (for iOS) and Google Play Store (for Android) and register with the phone number/email/Social Media account:




Step 1 . Connect the light with your Smartphone Open the "Smart Life" app - press the "Add" device in the upper right corner-select "Lighting" Device" - Select, then go to the Add device page.

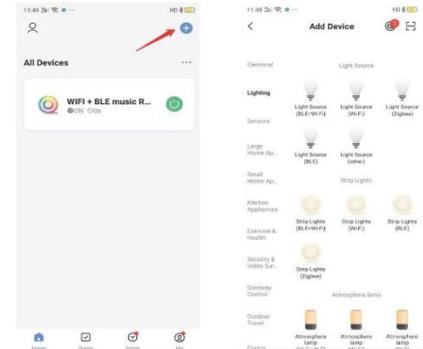

Step 2. Follow the instructions on the APP and let your device enter setup mode. If the light is blinking fast, skip the reset step

Note: There are two ways to reset the light


- 1. Power on
  - 2. Turn On-off(3-5sec.)-on-off(3-5sec.)-on-off(3-5sec.)-on-off(3-5sec.)-on-off(3-5sec.)-on-off(3-5sec.)(Repeat this step 5 times)
- ③ Ensure light is fast blinking)

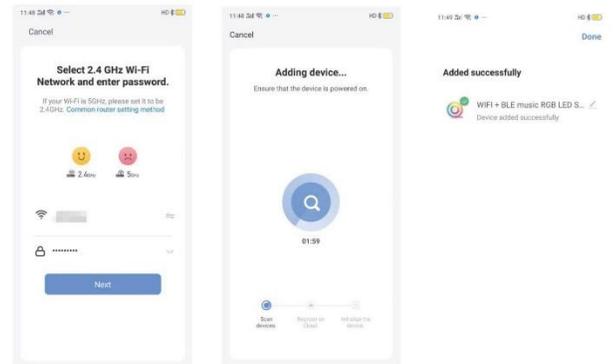


Step 3 . Confirm that the 360° Return Smart Light is flashing quickly-enter the Wi-Fi password to connect with the light ,connection successful . Choose the light level, color, and scene you like.



Step 4 . You can set the "left time" program on the left to turn off the light, and set the program on the right to set the opening and closing time of the 360° Return Smart Light, to enjoy your intelligent life.

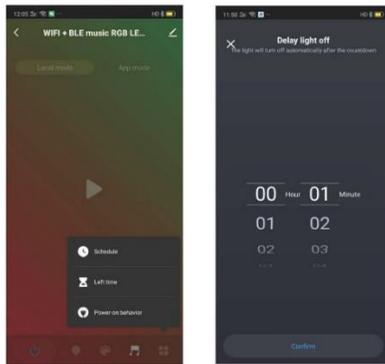

Step 5 . Install 360° Return Smart Light controlled by Alexa / Google Home Click for more services---select featured---select third party access service--select "Amazon Alexa" or "Google Assistant" ---follow the instructions.

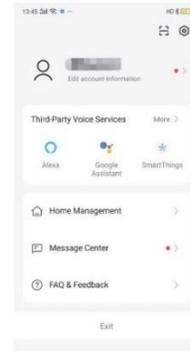

- Sync all NeuTerra Smart lights in your outdoor living space with unlimited color choices, lightshows or sync to your favorite music.
- Control lighting through your mobile enabled devices.



## **Unpack your new AQR-ABGSLD "Aquarius" Step/Ladder/Deck Light** **"DIY- PLUG & PLAY" Installation/Winterizing**

1. **\*IMPORTANT**-unplug the WiFi + BLE Smart Controller/Power Adapter after initial test.
2. Mark the location for your AQR-ABGSLD "Aquarius" Step/Ladder/Deck Light on the preferred Step Riser
3. Use the ½" Hole Saw to cut a ½" hole in the selected stair riser, pull the Connector and Cable through the front of the hole until your "Aquarius" Step/Ladder/Deck Light has no Cable slack.
4. Thread the ½" install fitting (supplied) through the Connector and Cable, clockwise thread into the threaded fitting on the back of the "Aquarius" Step/Ladder/Deck Light.
5. Tighten the install fitting with the adjustable pliers.
6. Pull the Cable and Connector outside of the pool, be sure to securely zip tie the Cable as needed (\*note thread the 5-Pin Quick Connect/Disconnect Connector outside of the pool)
7. Connect the 5-Pin Quick Connect/Disconnect Connector to the "Aquarius" Step/Ladder/Deck Light Install the WiFi + BLE Smart Controller/Power Adapter preferably sheltered from the elements. (Plug & Play).

### **Winterizing**

To prevent damage to your "Aquarius" Step/Ladder/Deck Light remove and store.

### **Warranty**

Your new "Aquarius" Step/Ladder/Deck Light. is warranted for a period of 36 months. The remote control and the 24V/DC power adapter are warranted for 12 months from date of purchase.

In order to activate this 36 months warranty, NeuTerra products must be registered with NeuTerra by the following method: Mail-in the Warranty Registration Card.

All defects must be announced within 72 hours failing which; the present warranty will not be honored. This warranty is nontransferable and extends only to the original retail buyer and only during the time in which the original retail buyer occupies the site where the product was originally installed.

This warranty applies to products used in swimming pools, spas, & aquaculture applications only and does not apply to any product which has been subjected to negligence, alteration, accident, abuse, misuse, improper installation, abrasives,

corrosion, improper voltage supply, vandalism, civil disturbances, or acts of God (including but not limited to damage caused by freezing, lightning strikes, and other damage caused by catastrophic events). The only warranties authorized by NeuTerra are those set forth herein. NeuTerra does not authorize other persons to extend any warranties with respect to its products, nor will NeuTerra assume liability for any unauthorized warranties made in connection with the sale of its products. NeuTerra will not be responsible for any statements that are made or published, written or oral, which are misleading or inconsistent with the facts as published in the literature or specifications furnished by NeuTerra.

## **Warranty Claim Procedure**

Warranty claims shall be made by contacting the installer/seller, builder, dealer, or retailer (point of purchase) or the NeuTerra pool products distributor in your area. All equipment must be inspected by a local NeuTerra authorized representative or at the factory before warranty is authorized. All charges or expenses for freight to and from the factory, removal and reinstallation of the products, or installation of a replacement product are the responsibility of the purchaser unless otherwise expressly authorized in writing by NeuTerra. NeuTerra, at its discretion, may repair or replace free of charge (F.O.B. 3641 Old Conejo Rd. Newbury Park CA 91320) any product that proves defective within the warranty period, or it may issue credit in the amount of the invoice of the defective product in lieu of its repair or replacement. NeuTerra reserves its right to substitute new or improved product on any replacements.

**Thank you for your purchase and “Bringing the Party Outside!”**



We hope you enjoy and tell your friends! For questions or additional product information, please visit our website at <http://www.neuterralighting.com/> or contact our Smart Lighting Team via [info@neuterralighting.com](mailto:info@neuterralighting.com)

